


## 地下オイルタンクの外郭及び構造施工要領

単位 mm

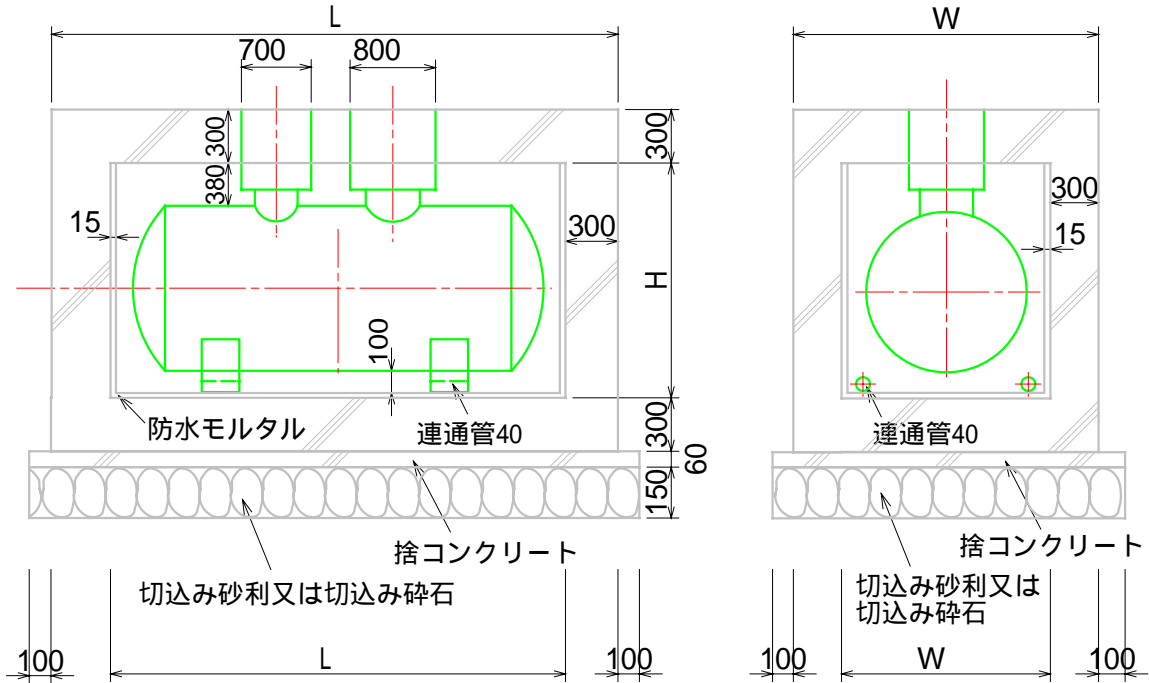

| 記号      | L      | W     | L'    | W'    | H     |
|---------|--------|-------|-------|-------|-------|
| TO-0.95 | 3,800  | 2,000 | 3,200 | 1,400 | 1,250 |
| TO-1.5  | 4,300  | 2,100 | 3,700 | 1,500 | 1,350 |
| TO-1.9  | 4,350  | 2,200 | 3,750 | 1,600 | 1,450 |
| TO-3    | 4,450  | 2,450 | 3,850 | 1,850 | 1,700 |
| TO-4    | 4,800  | 2,550 | 4,200 | 1,950 | 1,800 |
| TO-5    | 5,600  | 2,550 | 5,000 | 1,950 | 1,800 |
| TO-6    | 5,850  | 2,650 | 5,250 | 2,050 | 1,900 |
| TO-8    | 5,900  | 2,750 | 5,300 | 2,150 | 2,000 |
| TO-8    | 6,500  | 2,750 | 5,900 | 2,150 | 2,000 |
| TO-10   | 7,150  | 2,850 | 6,550 | 2,250 | 2,100 |
| TO-12   | 6,800  | 3,050 | 6,200 | 2,450 | 2,300 |
| TO-13   | 7,200  | 3,050 | 6,600 | 2,450 | 2,300 |
| TO-15   | 8,000  | 3,050 | 7,400 | 2,450 | 2,300 |
| TO-18   | 8,550  | 3,150 | 7,950 | 2,550 | 2,400 |
| TO-20   | 9,250  | 3,150 | 8,650 | 2,550 | 2,400 |
| TO-25   | 10,250 | 3,250 | 9,650 | 2,650 | 2,500 |
| TO-30   | 10,300 | 3,450 | 9,700 | 2,850 | 2,700 |